

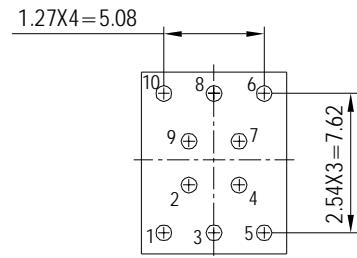
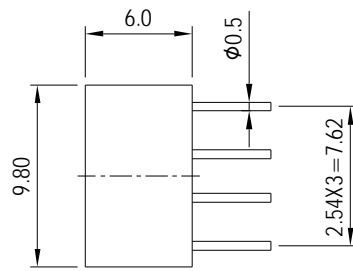




JOINSCAN LEDs

S.28C 0.28 INCH (7.1mm) SINGLE DIGIT THIN TYPE 9.8 X 8.1 X 6.0mm




(PIN LOCATION TOP VIEW)

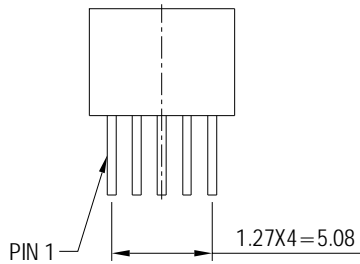


UNIT : mm
TOLERANCE : ±0.2mm


A. A2717 SERIES




B. C2717 SERIES



C. A2718 SERIES

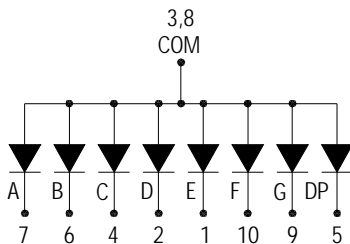

D. C2718 SERIES

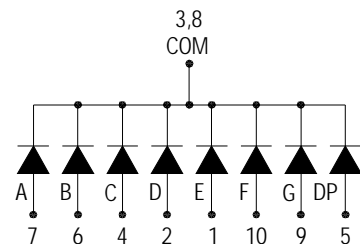

PIN FUNCTION	COLOR	COMMON ANODE			COMMON CATHODE			WAVE LENGTH (nm)	IR MAX (uA) VR=5V	VF (V) IF=20mA	LUMINOUS INTENSITY IF=20mA
		A	C	E	B	D	F				
Emitting	RED	A2717H	A2718H		C2717H	C2718H		695	100	2.2	0.4mcd
	ORANGE RED	A2717O	A2718O		C2717O	C2718O		630	100	2.0	2.5mcd
	GREEN	A2717G	A2718G		C2717G	C2718G		570	100	2.2	4.5mcd
	Yellow	A2717Y	A2718Y		C2717Y	C2718Y		600	100	2.2	2.5mcd
	SUPER RED	A2717RS	A2718RS		C2717RS	C2718RS		650	100	1.8	3.0mcd
	ULTRA RED										
	YELLOW GREEN										
	BLUE	A2717SF	A2718SF		C2717SF	C2718SF		465±5	100	3.6	5.0mcd
	WHITE										

Model No. -BW BLACK SURFACE WHITE SEGMENT
-BR BLACK SURFACE RED SEGMENT
-GW GRAY SURFACE WHITE SEGMENT

Remark :

1. Typical forward current 10-20mA · MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260°C +5°C -30°C
3. Peak Forward current Per Dice · Duty cycle 1/10 · 10KHZ · MAXimum 120mA
4. Operating Temperature From -25°C to 85°C
5. ROHS COMPLIANT

REV : B