



JOINSCAN LEDs


F.40J 0.4 INCH (10.16mm) 3.5 DIGITs ONE SIDE 15 PIN WITH BENT 31.0 X 16.0 X 7.0mm

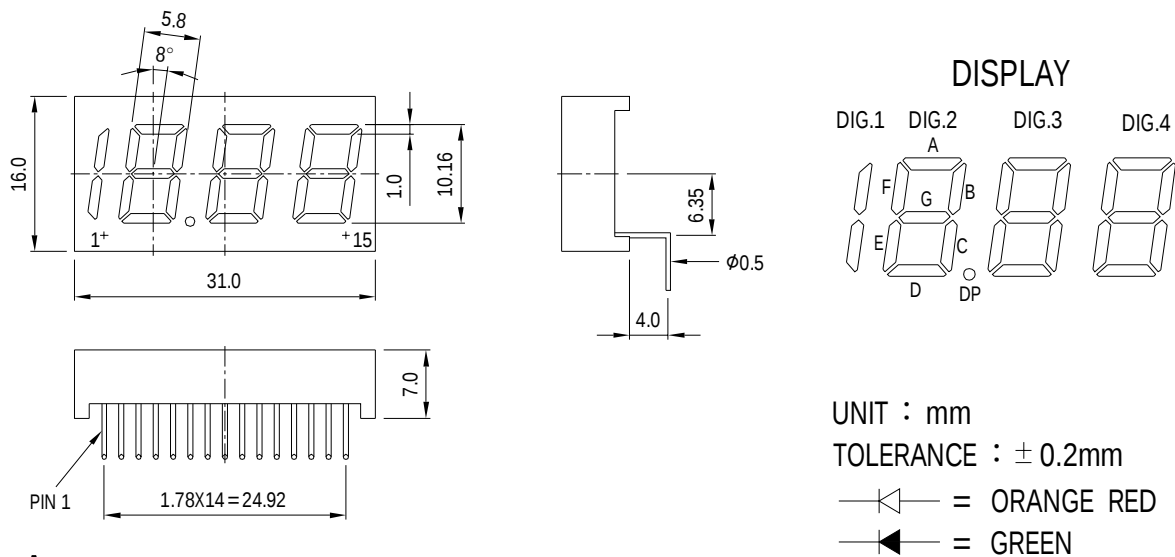

A. E4647C - H4

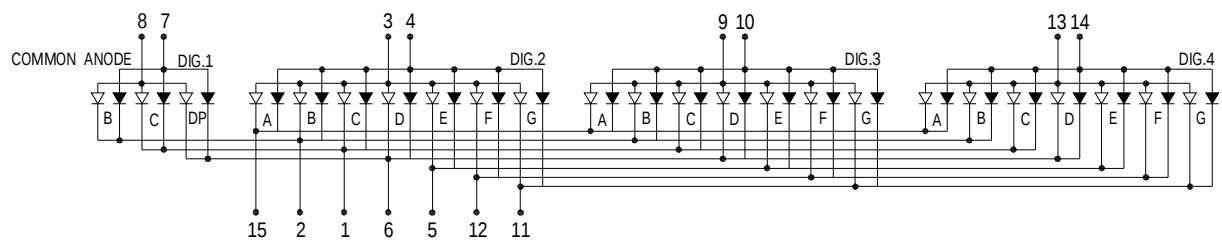

B. F4647C - H4

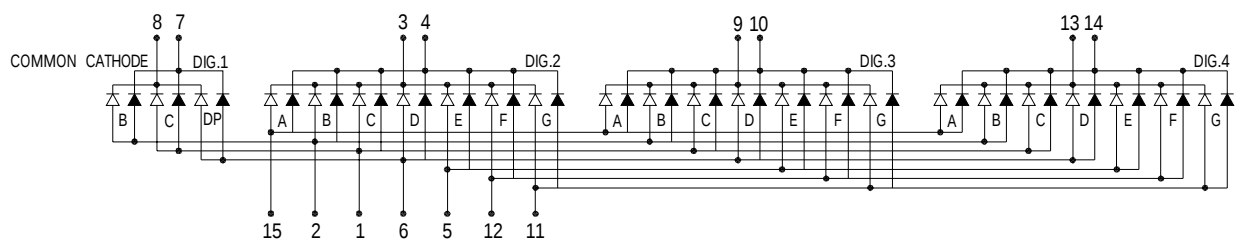

PIN FUNCTION	COMMON ANODE			COMMON CATHODE			WAVE LENGTH (nm)	IR MAX (uA) VR = 5V	VF (V) IF = 20mA	LUMINOUS INTENSITY IF = 20mA
	A	C	E	B	D	F				
Emitting COLOR	model no.	model no.	model no.	model no.	model no.	model no.				
GaP RED										
GaAsP ORANGE RED							635	100	2.0	2.5mcd
GaP Green							570	100	2.2	4.5mcd
Gap Yellow										
GaAlAs RED										
GaAlAs RED										
GaAlAs YELLOW GREEN										
Sic BLUE										
ZnSe WHITE										

Model No. - BW BLACK SURFACE WHITE SEGMENT

- BR BLACK SURFACE RED SEGMENT

- GW GRAY SURFACE WHITE SEGMENT

Remark :

1. Typical forward current 10 ~ 20mA, MAXimum forward current 25mA

2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260°C +5°C -30°C

3. Peak Foward current Per Dice, Duty cycle 1 / 10, 10KHZ, MAXimum 120mA

4. Operating Temperature From -25°C to 85°C

5. ROHS COMPLIANT

REV:A