



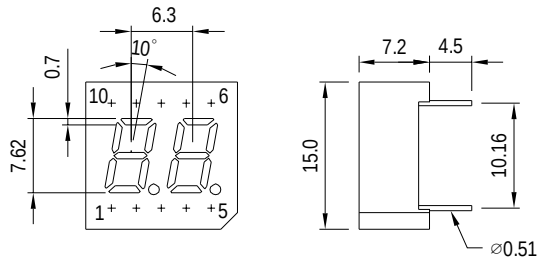
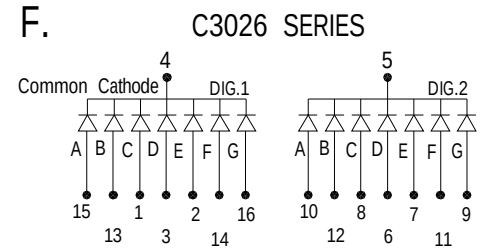
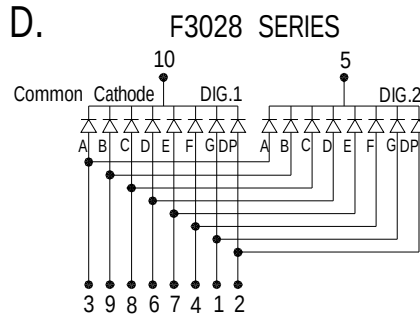
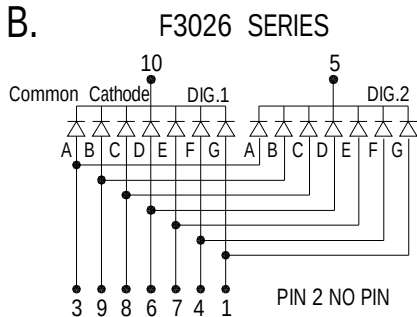
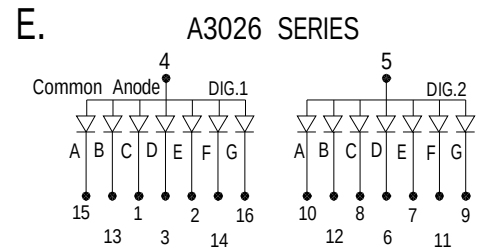
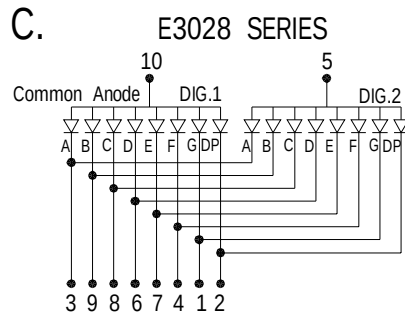
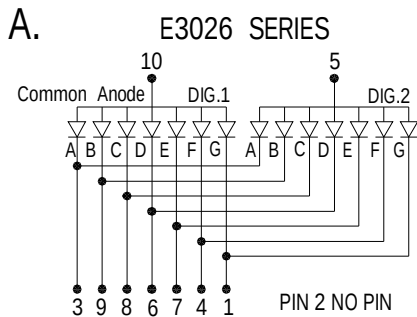


JOINSCAN LEDs

D.30A 0.3 INCH (7.62mm) DUAL DIGIT 15.5 X 15.0 X 7.2mm 10PINS & 16PINS

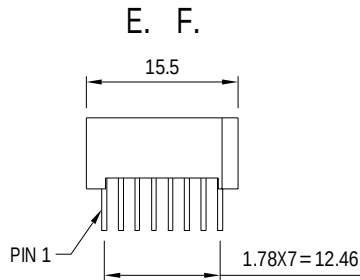

Unit : mm
Tolerance : $\pm 0.2\text{mm}$

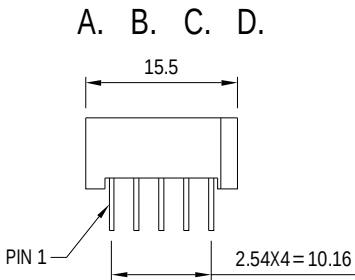

PIN FUNCTION	COMMON ANODE			COMMON CATHODE			WAVE LENGTH (nm)	IR MAX (uA) VR = 5V	VF (V) IF = 20mA	LUMINOUS INTENSITY IF = 10mA
	A	C	E	B	D	F				
Emitting COLOR	model no.	model no.	model no.	model no.	model no.	model no.				
GaP RED	E3026H	E3028H	A3026H	F3026H	F3028H	C3026H	695	100	2.2	0.6mcd
GaAsP ORANGE RED	E3026O	E3028O	A3026O	F3026O	F3028O	C3026O	635	100	2.0	2.5mcd
GaP GREEN	E3026G	E3028G	A3026G	F3026G	F3028G	C3026G	570	100	2.2	3.5mcd
Gap Yellow	E3026Y	E3028Y	A3026Y	F3026Y	F3028Y	C3026Y	600	100	2.2	3.5mcd
GaAlAs SUPER RED	E3026RS	E3028RS	A3026RS	F3026RS	F3028RS	C3026RS	650	100	1.8	3.3mcd
GaAlInp ULTRA GREEN										
GaN PURE GREEN										
Sic BLUE	E3026SF	E3028SF	A3026SF	F3026SF	F3028SF	C3026SF	465 $\pm$ 5	100	3.6	30mcd

Model No.-BW Black Surface White Segment
-BR Black Surface Red Segment
-GW Gray Surface White Segment

Remark :

1. Typical forward current 10~20mA , MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260 °C +5 °C -30 °C
3. Peak Forward current Per Dice , Duty cycle 1/10 , 1KHZ , MAXimum 120mA
4. Operating Temperature From -40 °C to 80 °C
5. RoHS Compliance

REV : C