

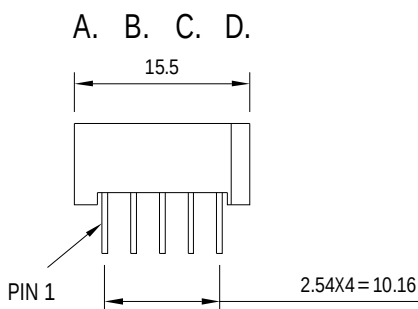




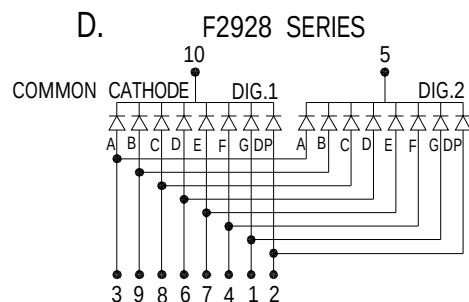
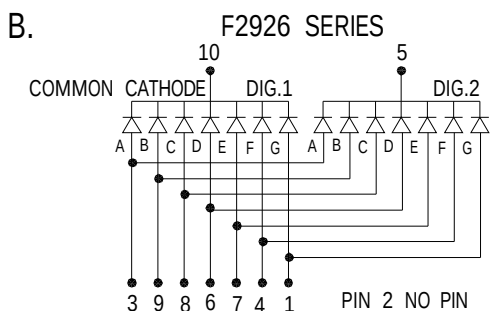


JOINSCAN LEDs

D.30C 0.3 INCH (7.62mm) DUAL DIGIT THICK TYPE 9.4mm 15.5 X 15.0 X 9.4mm

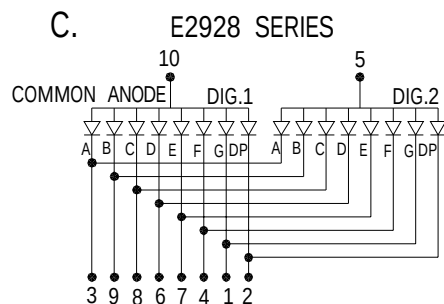

UNIT : mm
TOLERANCE : ± 0.2 mm

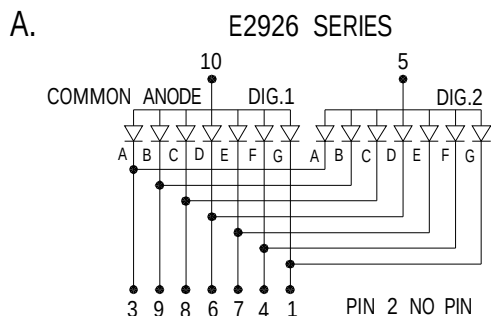

PIN	FUNCTION	COMMON ANODE		COMMON CATHODE		WAVE LENGTH (nm)	IR MAX (uA) VR = 5V	VF (V) IF = 20mA	LUMINOUS INTENSITY IF = 10mA
		A	C	B	D				
Emitting	COLOR	model no.	model no.	model no.	model no.				
GaP	RED	E2926H	E2928H	F2926H	F2928H	695	100	2.2	0.4mcd
GaAsP	ORANGE RED	E2926O	E2928O	F2926O	F2928O	635	100	2.0	2.5mcd
GaP	GREEN	E2926G	E2928G	F2926G	F2928G	570	100	2.2	4.5mcd
Gap	Yellow	E2926Y	E2928Y	F2926Y	F2928Y	600	100	2.2	2.5mcd
GaAlAs	SUPER RED	E2926RS	E2928RS	F2926RS	F2928RS	650	100	1.8	3.0mcd
GaAlInp	ULTRA GREEN								
GaN	PURE GREEN								
Sic	BLUE	E2926SF	E2928SF	F2926SF	F2928SF	465 $\pm$ 5	100	3.6	10mcd
ZnSe	WHITE								

Model No.-BW Black Surface White Segment
-BR Black Surface Red Segment
-GW Gray Surface White Segment

Remark :

1. Typical forward current 10~20mA , MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260 °C +5°C -30°C
3. Peak Forward current Per Dice , Duty cycle 1/10 , 1KHZ , MAXimum 120mA
4. Operating Temperature From -40 °C to 80°C
5. RoHS Compliance

REV : C