
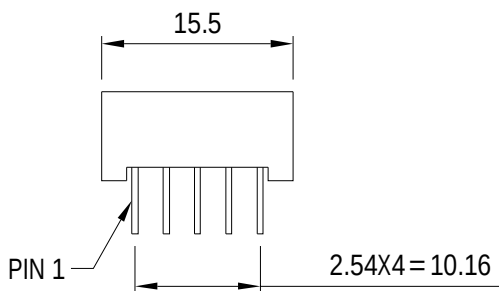





JOINSCAN LEDs

D.30D 0.3 INCH (7.62mm) DUAL DIGIT THIN TYPE 4.5mm 15.5 X 15.0 X 4.5mm




UNIT : mm
TOLERANCE : ± 0.2 mm

A. E3126 SERIES

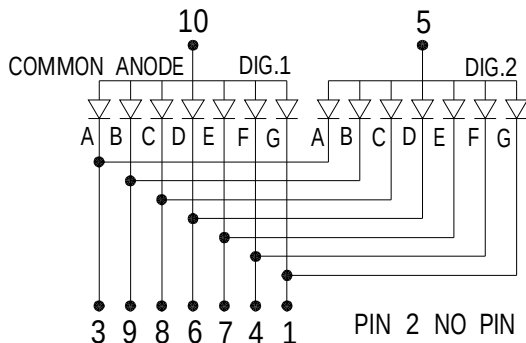

B. F3126 SERIES

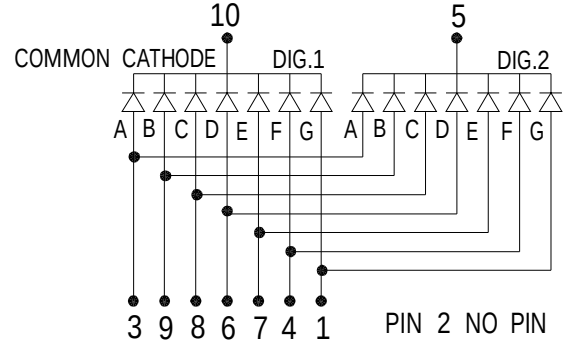

PIN FUNCTION	COMMON ANODE		COMMON CATHODE		WAVE LENGTH (nm)	IR MAX (uA)	VF (V)	LUMINOUS INTENSITY
	A	C	B	D				
Emitting COLOR	model no.	model no.	model no.	model no.		VR = 5V	IF = 20mA	IF = 10mA
GaP RED	E3126H		F3126H		695	100	2.2	0.4mcd
GaAsP ORANGE RED	E3126O		F3126O		635	100	2.0	2.5mcd
GaP GREEN	E3126G		F3126G		570	100	2.2	4.5mcd
Gap Yellow	E3126Y		F3126Y		600	100	2.2	2.5mcd
GaAlAs SUPER RED	E3126RS		F3126RS		650	100	1.8	3.0mcd
GaAlInp ULTRA GREEN								
GaN PURE GREEN								
Sic BLUE	E3126SF		F3126SF		465 $\pm$ 5	100	3.6	10mcd
ZnSe WHITE								

Model No.-BW Black Surface White Segment
-BR Black Surface Red Segment
-GW Gray Surface White Segment

Remark :

1. Typical forward current 10~20mA , MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260 °C +5 °C -30 °C
3. Peak Forward current Per Dice , Duty cycle 1/10 , 1KHZ , MAXimum 120mA
4. Operating Temperature From -40 °C to 80 °C
5. RoHS Compliance

REV : C