




JOINSCAN LEDs







D.30E 0.3 INCH (7.62mm) DUAL DIGIT 16.7 X 16 X 6mm



A. B. C. D.

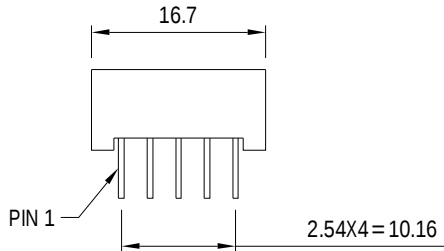

UNIT : mm
TOLERANCE : $\pm 0.2\text{mm}$

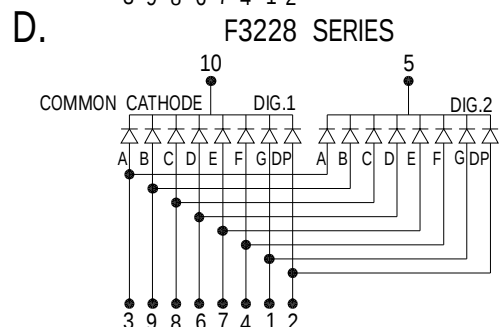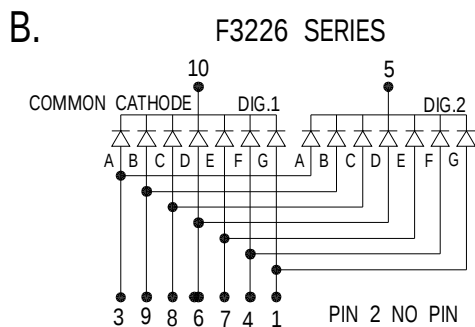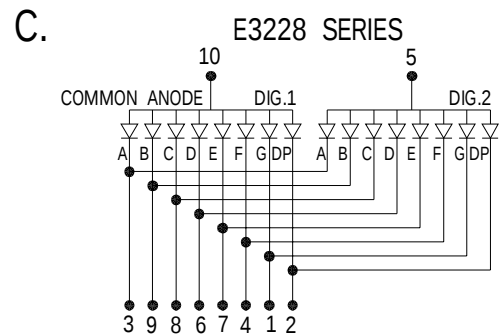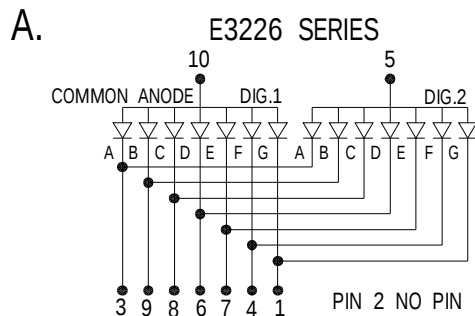

PIN	FUNCTION	COMMON ANODE		COMMON CATHODE		WAVE LENGTH (nm)	IR MAX (uA)	VF (V)	LUMINOUS INTENSITY
		A	C	B	D				
model no.	COLOR	model no.	model no.	model no.	model no.				
GaP	RED	E3226H	E3228H	F3226H	F3228H	695	100	2.2	0.4mcd
GaAsP	ORANGE RED	E3226O	E3228O	F3226O	F3228O	635	100	2.0	2.5mcd
GaP	GREEN	E3226G	E3228G	F3226G	F3228G	570	100	2.2	4.5mcd
GaP	Yellow	E3226Y	E3228Y	F3226Y	F3228Y	600	100	2.2	2.5mcd
GaAlAs	SUPER RED	E3226RS	E3228RS	F3226RS	F3228RS	650	100	1.8	3.0mcd
GaAlAs	ULTRA RED								
GaAlAs	YELLOW GREEN								
Sic	BLUE	E3226SF	E3228SF	F3226SF	F3228SF	465 $\pm$ 5	100	3.6	10mcd
ZnSe	WHITE								

Model No. -BW BLACK SURFACE WHITE SEGMENT
-BR BLACK SURFACE RED SEGMENT
-GW GRAY SURFACE WHITE SEGMENT

Remark :

1. Typical forward current 10~20mA , MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260°C +5°C -30°C
3. Peak Foward current Per Dice , Duty cycle 1/10 , 10KHZ , MAXimum 120mA
4. Operating Temperature From -25°C to 85°C
5. RoHS COMPLIANT

REV : B