
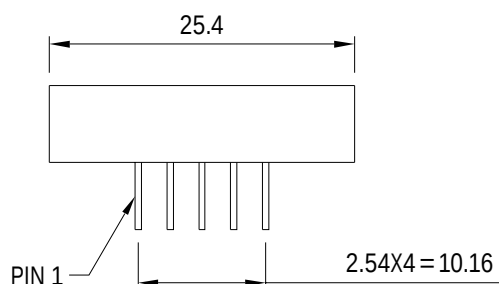





JOINSCAN LEDs

D.30F 0.3 INCH (7.62mm) DUAL DIGIT LARGE TYPE 25.4 X 16 X 4.5mm

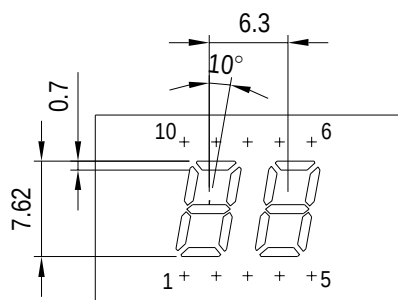


UNIT : mm
TOLERANCE : $\pm 0.2\text{mm}$

A. E3326 SERIES

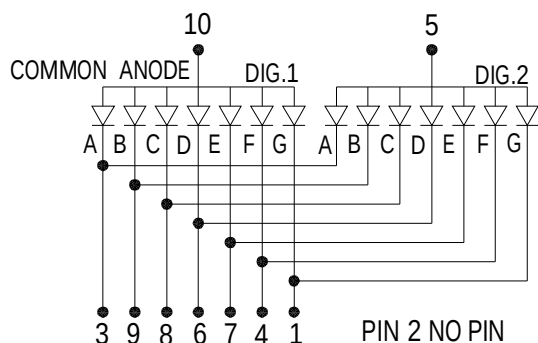

B. F3326 SERIES

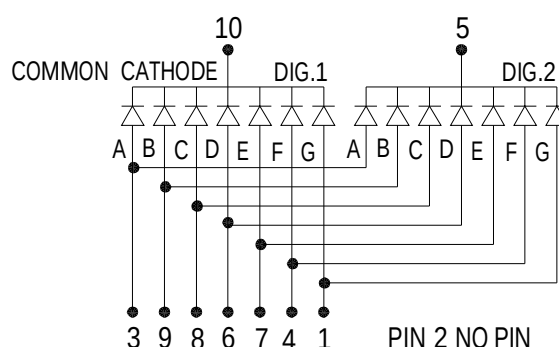

PIN	FUNCTION	COMMON ANODE		COMMON CATHODE		WAVE LENGTH (nm)	IR MAX (uA)	VF (V)	LUMINOUS INTENSITY
		A	C	B	D				
	model no.	model no.	model no.	model no.	model no.				
Emitting	COLOR						VR = 5V	IF = 20mA	IF = 20mA
GaP	RED	E3326H		F3326H		695	100	2.2	0.4mcd
GaAsP	ORANGE RED	E3326O		F3326O		635	100	2.0	2.5mcd
GaP	GREEN	E3326G		F3326G		570	100	2.2	4.5mcd
GaP	Yellow	E3326Y		F3326Y		600	100	2.2	2.5mcd
GaAlAs	SUPER RED	E3326RS		F3326RS		650	100	1.8	3.0mcd
GaAlAs	ULTRA RED								
GaAlAs	YELLOW GREEN								
Sic	BLUE	E3326SF		F3326SF		465 $\pm$ 5	100	3.6	10mcd
ZnSe	WHITE								

Model No. -BW BLACK SURFACE WHITE SEGMENT
-BR BLACK SURFACE RED SEGMENT
-GW GRAY SURFACE WHITE SEGMENT

Remark :

1. Typical forward current 10~20mA , MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260°C +5°C -30°C
3. Peak Foward current Per Dice , Duty cycle 1/10 , 10KHZ , MAXimum 120mA
4. Operating Temperature From -25°C to 85°C
5. RoHS COMPLIANT

REV : B