






JOINSCAN LEDs

D.40B 0.4 INCH (10.0mm) DUAL DIGIT WITH ONE COMMON PIN 20.2 X 16.0 X 7.0mm

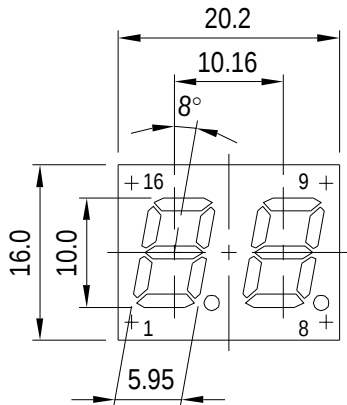


UNIT : mm
TOLERANCE : $\pm 0.2\text{mm}$

A. A4027 SERIES

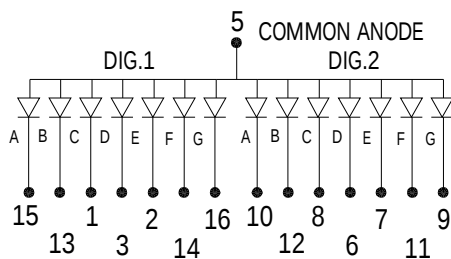

Pin4 No Connection

B. C4027 SERIES

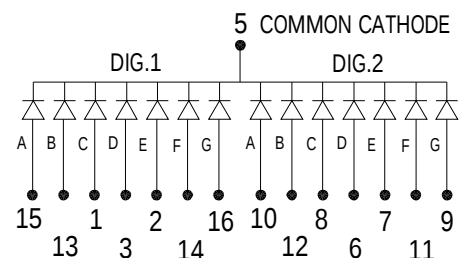

Pin4 No Connection

PIN FUNCTION	COMMON ANODE			COMMON CATHODE			WAVE LENGTH (nm)	IR MAX (uA)	VF (V)	LUMINOUS INTENSITY
	A	C	E	B	D	F				
Emitting COLOR	model no.	model no.	model no.	model no.	model no.	model no.				
GaP RED	A4027H			C4027H			695	100	2.2	0.6mcd
GaAsP ORANGE RED	A4027O			C4027O			635	100	2.0	2.5mcd
GaP GREEN	A4027G			C4027G			570	100	2.2	3.5mcd
Gap Yellow	A4027Y			C4027Y			600	100	2.2	3.5mcd
GaAlAs SUPER RED	A4027RS			C4027RS			650	100	1.8	3.3mcd
GaAlAs ULTRA RED										
GaAlAs YELLOW GREEN										
Sic BLUE	A4027SF			C4027SF			465 $\pm$ 5	100	3.6	10.0mcd
ZnSe WHITE										

Model No. -BW BLACK SURFACE WHITE SEGMENT
-BR BLACK SURFACE RED SEGMENT
-GW GRAY SURFACE WHITE SEGMENT

Remark :

1. Typical forward current 10~20mA , MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260°C +5°C -30°C
3. Peak Forward current Per Dice , Duty cycle 1/10 , 10KHZ , MAXimum 120mA
4. Operating Temperature From -25°C to 85°C
5. RoHS COMPLIANT

REV : B