
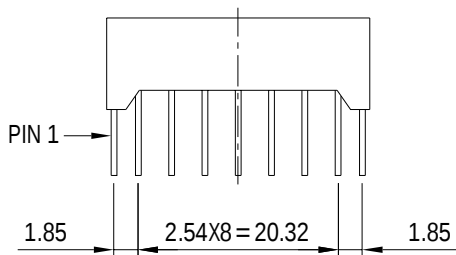





JOINSCAN LEDs

D.40E 0.4 INCH (10.2mm) DUAL DIGITS 18 PINS 20.1 X 16.0 X 7.0mm

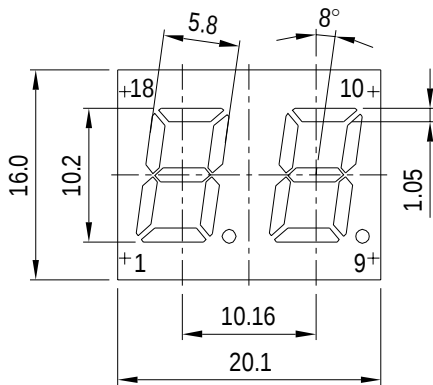


UNIT : mm
TOLERANCE : $\pm 0.2\text{mm}$

A. A4028 SERIES

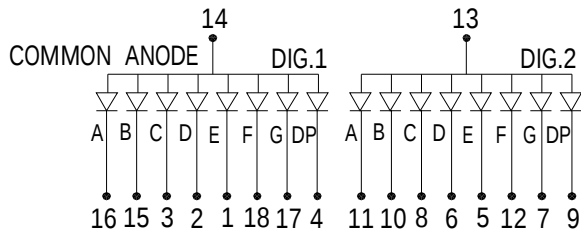

B. C4028 SERIES

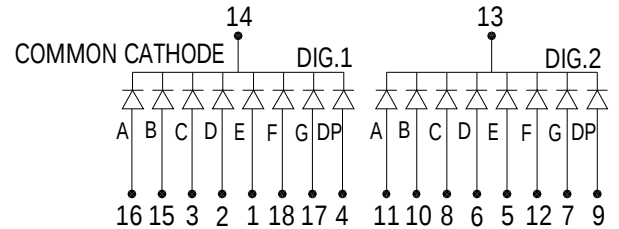

PIN FUNCTION	COLOR	COMMON ANODE			COMMON CATHODE			WAVE LENGTH (nm)	IR MAX (uA) VR = 5V	VF (V) IF = 20mA	LUMINOUS INTENSITY IF = 20mA
		A mode I no.	C model no.	E model no.	B model no.	D model no.	F model no.				
Emitting	RED	A4028H			C4028H			695	100	2.2	0.4mcd
	ORANGE RED	A4028O			C4028O			635	100	2.0	2.5mcd
	Green	A4028G			C4028G			570	100	2.2	4.5mcd
	Yellow	A4028Y			C4028Y			600	100	2.2	2.5mcd
	RED	A4028RS			C4028RS			650	100	1.8	3.0mcd
	RED										
	YELLOW GREEN										
	BLUE	A4028SF			C4028SF			465 $\pm$ 5	100	3.6	10mcd
	WHITE										

Model No. -BW BLACK SURFACE WHITE SEGMENT
-BR BLACK SURFACE RED SEGMENT
-GW GRAY SURFACE WHITE SEGMENT

Remark :

1. Typical forward current 10~20mA, MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260°C +5°C -30°C
3. Peak Foward current Per Dice, Duty cycle 1/10, 10KHZ, MAXimum 120mA
4. Operating Temperature From -25°C to 85°C
5. RoHS COMPLIANT

REV : B