



JOINSCAN LEDs


S.40K 0.40 INCH (10.0mm) SINGLE DIGIT ALPHABET TYPE 20.8 X 9.9 X 9.8mm

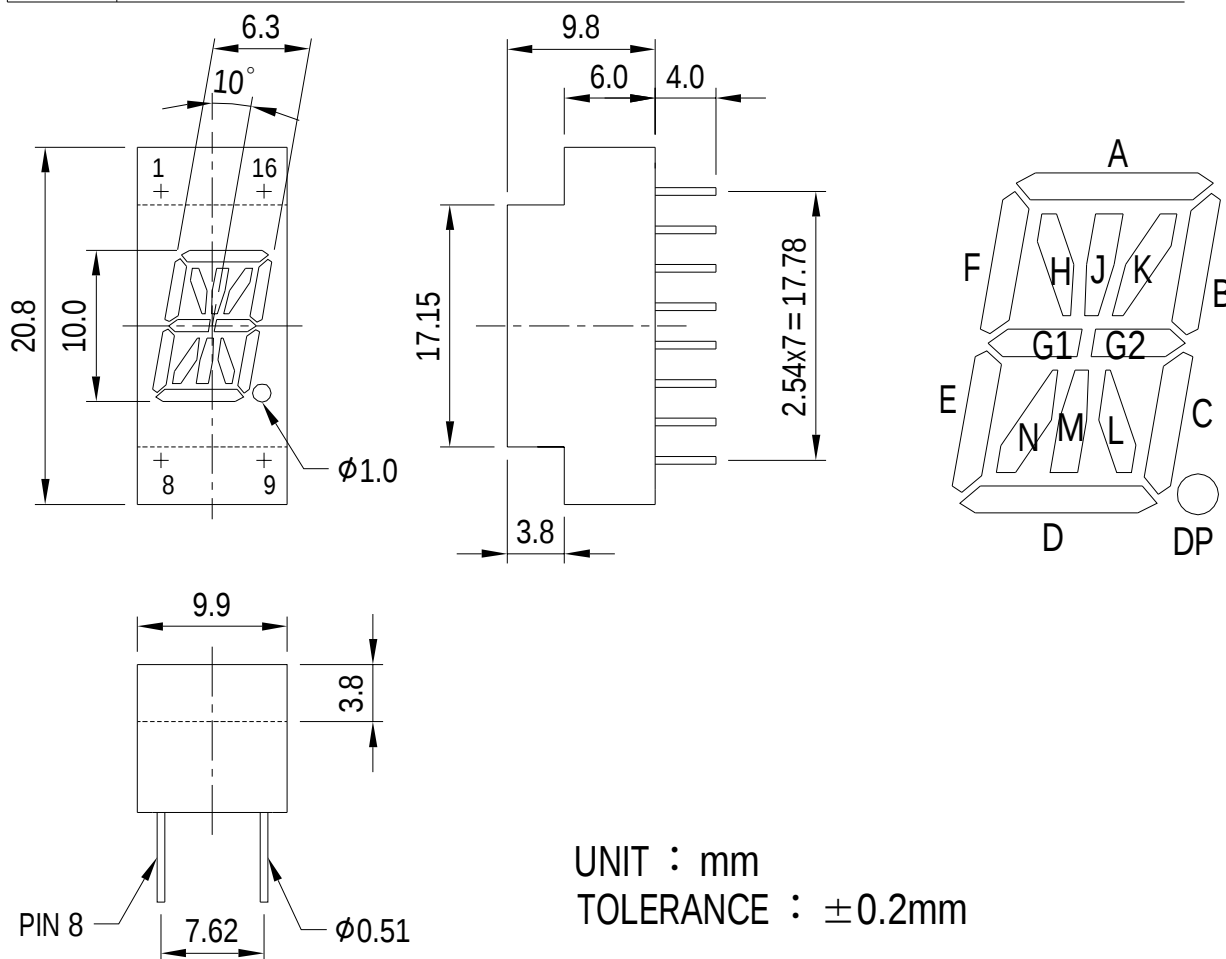

A. A401K SERIES

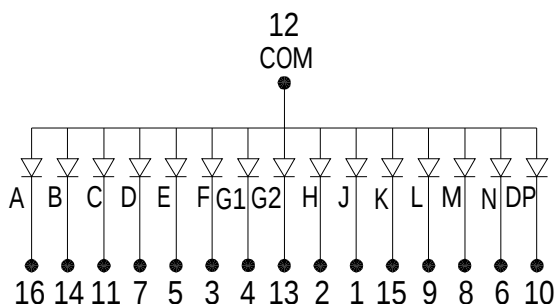

B. C401K SERIES

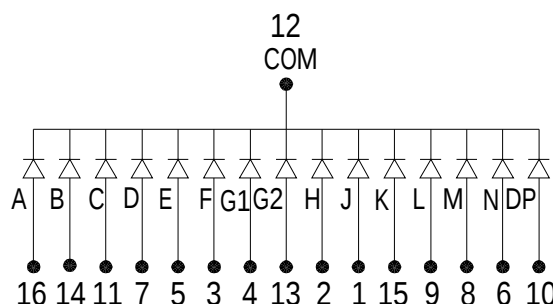

PIN FUNCTION	COMMON ANODE			COMMON CATHODE			WAVE LENGTH	IR MAX (uA)	VF (V)	LUMINOUS INTENSITY
	A	C	E	B	D	F				
Emitting COLOR	model no.	model no.	model no.	model no.	model no.	model no.	(nm)	VR=5V	IF=20mA	IF=20mA
GaP RED	A401KH			C401KH			695	100	2.2	0.6mcd
GaAsP ORANGE RED	A401KO			C401KO			635	100	2.0	4.0mcd
GaP GREEN	A401KG			C401KG			570	100	2.2	4.5mcd
Gap Yellow	A401KY			C401KY			600	100	2.2	4.0mcd
GaAlAs SUPER RED	A401KRS			C401KRS			650	100	1.8	8.0mcd
GaAlAs ULTRA RED										
GaAlAs YELLOW GREEN										
Sic BLUE	A401KSF			C401KSF			465 $\pm$ 5	100	3.6	10mcd
ZnSe WHITE										

Model No. -BW BLACK SURFACE WHITE SEGMENT
-BR BLACK SURFACE RED SEGMENT
-GW GRAY SURFACE WHITE SEGMENT

Remark :

1. Typical forward current 10~20mA, MAXimum forward current 25mA
2. Solder Temperature 1.6mm Below Seating plane less 5 seconds at 260°C +5°C -30°C
3. Peak Forward current Per Dice, Duty cycle 1/10, 10KHZ, MAXimum 120mA
4. Operating Temperature From -25°C to 85°C
5. RoHS COMPLIANT

REV : C