


JOINSCAN LEDs

2 X 5 mm 3PINs DUAL COLOR CLEAR TYPE LED LAMP	
MODEL NO.	L256YC+
EMITTING COLOR	YELLOW / YELLOW
DICE	GaP / GaP
LENS	CLEAR TYPE

ABSOLUTE MAXIMUM RATINGS (最大極限值)			
TA = 25 °C			
PARAMETER	SYMBOL	RATING	UNIT
D1 YELLOW POWER DISSIPATION	P AD	44.0	mW
D2 YELLOW POWER DISSIPATION	P AD	44.0	mW
DERATING LINEAR FROM 25 °C		0.27	m / °C
D1 YELLOW CONTINUOUS FORWARD CURRENT	I AF	20.0	mA
D2 YELLOW CONTINUOUS FORWARD CURRENT	I AF	20.0	mA
PEAK FORWARD CURRENT (DUTY CYCLE 1 / 10 , 10KHZ)	I PF	90.0	mA
REVERSE VOLTAGE	V R	5.0	V
OPERATING TEMPERATURE	T OPR	-25°C TO + 85 °C	
STORAGE TEMPERATURE	T STG	-25°C TO + 85 °C	
SOLDER TEMPERATURE 1/16 INCH BELOW SEATING PLANE FOR 5 SECONDS AT 230 °C OR 3 SECONDS AT 250 °C			

D1 YELLOW ELECTRO - OPTICAL CHARACTERISTICS (電性)						
TA = 25℃						
PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
FORWARD VOLTAGE	V _F	I _F = 20mA	—	2.0	—	V
LUMINOUS INTENSITY	I _V	I _F = 20mA	—	37	—	mcd
PEAK EMISSION WAVELENGTH	λ _P	I _F = 20mA	—	600	—	nm
REVERSE CURRENT	I _R	V _R = 5V	—	—	100	μA

D2 YELLOW ELECTRO - OPTICAL CHARACTERISTICS (電性)						
TA = 25℃						
PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
FORWARD VOLTAGE	V _F	I _F = 20mA	—	2.0	—	V
LUMINOUS INTENSITY	I _V	I _F = 20mA	—	37	—	mcd
PEAK EMISSION WAVELENGTH	λ _P	I _F = 20mA	—	600	—	nm
REVERSE CURRENT	I _R	V _R = 5V	—	—	100	μA

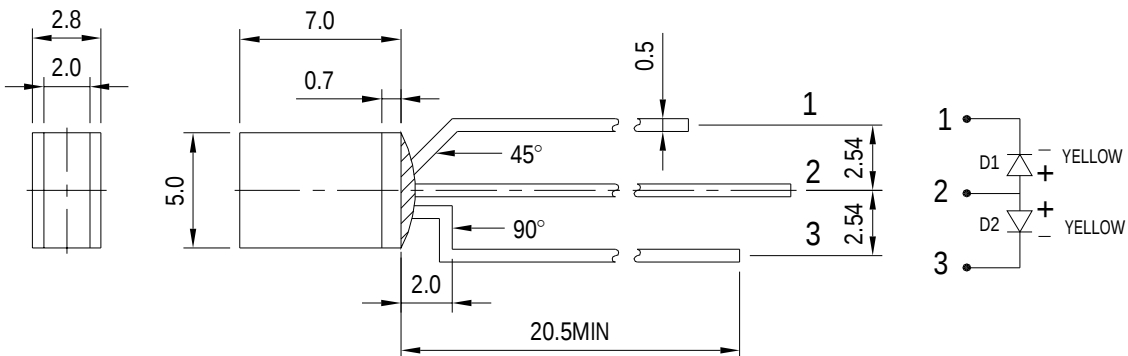

UNIT : mm
TOLERANCE : $\pm 0.2\text{mm}$
REV : B