


JOINSCAN LEDs

L507XD-DCV DC 3V ~ 32V DIA 5 mm LED WITH INTERNAL RESISTOR.

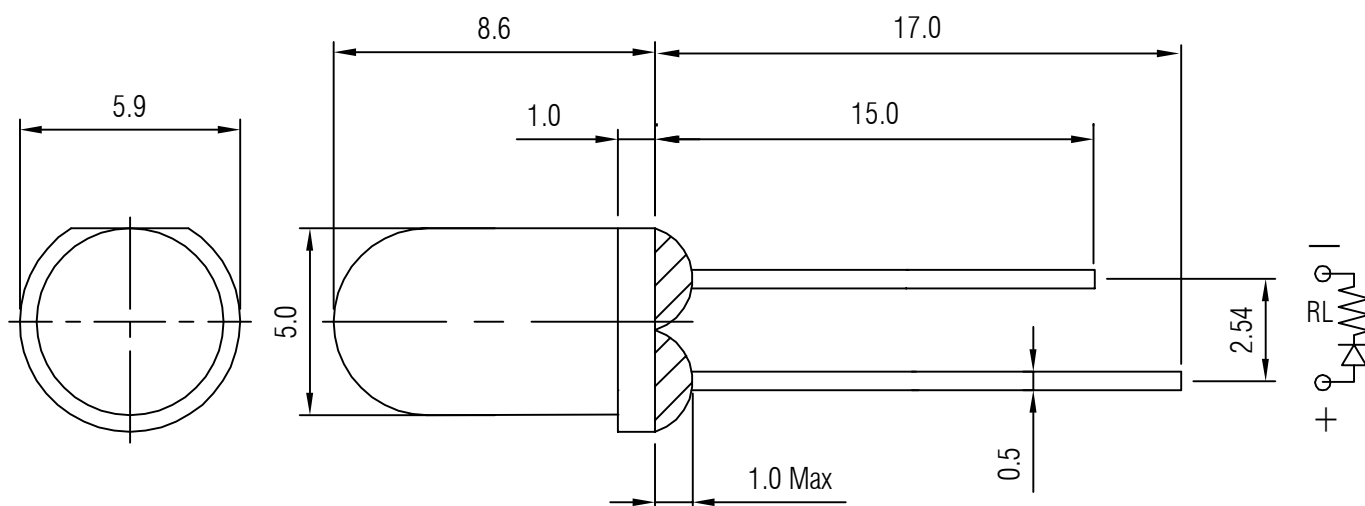

Unit : mm
Tolerance : $\pm 0.2\text{mm}$

JOINSCAN'S 5mm LED OPERATION RANGE DC3V~DC32V

Emitting Color& Lens	DC3V Series	DC6V Series	DC9V Series	DC12V Series	DC15V Series	DC24V Series	DC32V Series
Red Diffusing 625nm	L507ED-DC3V	L507ED-DC6V	L507ED-DC9V	L507ED-DC12V	L507ED-DC15V	L507ED-DC24V	L507ED-DC32V
Orange Diffusing 610nm	L507OD-DC3V	L507OD-DC6V	L507OD-DC9V	L507OD-DC12V	L507OD-DC15V	L507OD-DC24V	L507OD-DC32V
Yellow Diffusing 590nm	L507YD-DC3V	L507YD-DC6V	L507YD-DC9V	L507YD-DC12V	L507YD-DC15V	L507YD-DC24V	L507YD-DC32V
Green Diffusing 570nm	L507GD-DC3V	L507GD-DC6V	L507GD-DC9V	L507GD-DC12V	L507GD-DC15V	L507GD-DC24V	L507GD-DC32V
Blue Diffusing 470nm	L507SFD-DC3V	L507SFD-DC6V	L507SFD-DC9V	L507SFD-DC12V	L507SFD-DC15V	L507SFD-DC24V	L507SFD-DC32V
White Diffusing	L5073D-DC3V	L5073D-DC6V	L5073D-DC9V	L5073D-DC12V	L5073D-DC15V	L5073D-DC24V	L5073D-DC32V
Green Diffusing 525nm	L507GP-DC3V	L507GP-DC6V	L507GP-DC9V	L507GP-DC12V	L507GP-DC15V	L507GP-DC24V	L507GP-DC32V

Remark :

1. Solder Temperature 1.6mm Below Seating plane less 5 seconds at $260^{\circ}\text{C} +5^{\circ}\text{C} -30^{\circ}\text{C}$
2. Operating Temperature From -25°C to 85°C
3. RoHS Compliance

Approval Date :
20102/Feb / 16 / 11 : 00