


JOINSCAN LEDs

LED LAMP $\varnothing 3.0\text{ mm}$ SERIES VIEW ANGLE 15°	
MODEL NO.	L314FCU
EMITTING COLOR	BLUE
DICE	GaP
LENS	WATER CLEAR

ABSOLUTE MAXIMUM RATINGS (最大極限值) TA = 25 °C			
PARAMETER	SYMBOL	RATING	UNIT
POWER DISSIPATION	P AD	50.0	mW
DERATING LINEAR FROM 25 °C		0.27	m / °C
CONTINUOUS FORWARD CURRENT	I AF	25.0	mA
PEAK FORWARD CURRENT (DUTY CYCLE 1 / 10 , 10KHZ)	I PF	90.0	mA
REVERSE VOLTAGE	V R	5.0	V
OPERATING TEMPERATURE	T OPR	-25 °C TO + 85 °C	
STORAGE TEMPERATURE	T STG	-25 °C TO + 85 °C	
SOLDER TEMPERATURE 1 / 16 INCH BELOW SEATING PLANE FOR 5 SECONDS AT 230 °C			

ELECTRO - OPTICAL CHARACTERISTICS (電性) TA = 25 °C						
PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
FORWARD VOLTAGE	V F	I F = 20mA	—	3.6	—	V
LUMINOUS INTENSITY	I V	I F = 20mA	—	150	—	mcd
PEAK EMISSION WAVELENGTH	λ P	I F = 20mA	—	465	—	nm
REVERSE CURRENT	I P	I F = 5mA	—	—	100	μ A

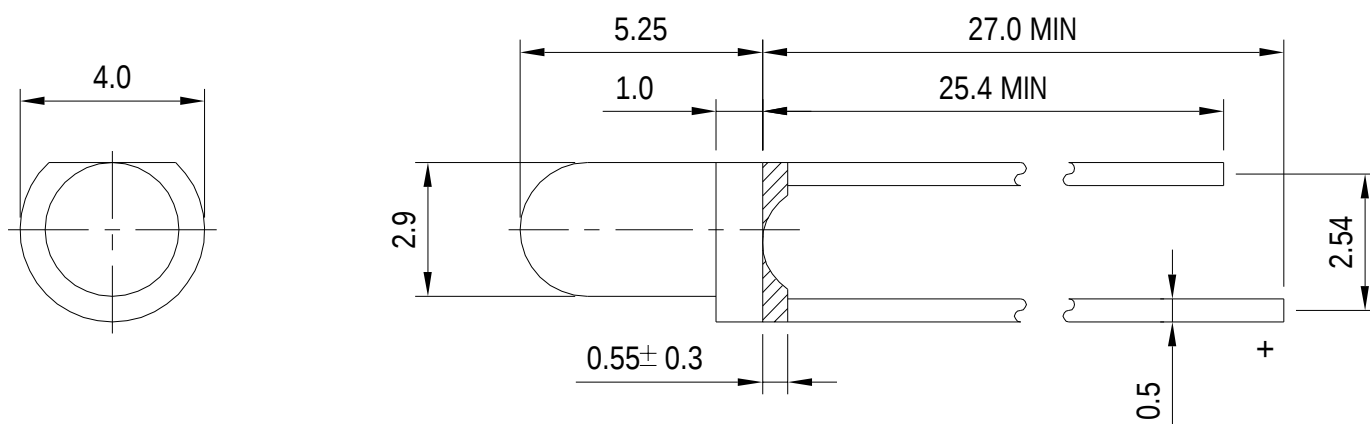

UNIT : mm

TOLERANCE : $\pm 0.2\text{mm}$

REV : B